


NOTES:


- MATERIAL:**
 - 1-1 HOUSING: THERMOPLASTIC, UL 94V-0, COLOR: BLACK
 - 1-2 CONTACT: COPPER ALLOY T=0.10mm
 - 1-3 NAIL: STAINLESS STEEL, T=0.15mm
- FINISH:**
 - 2-1 CONTACT: GOLD FLASH PLATING ON CONTACT AREA (SEE P/N) 100u" MIN Tin PLATING ON SOLDER TAILS 50u" MIN. NICKEL UNDERPLATING OVER ALL
 - 2-2 NAIL: 50u" MIN NICKEL UNDERPLATING, 100~200u" TIN OVERALL
- PRODUCT SPECIFICATIONS:**
 - 3-1 VOLTAGE RATING: 250V
 - 3-2 CURRENT RATING: 2.0A
 - 3-3 INSULATION RESISTANCE: 1000MEG.OHM MIN
 - 3-3 CONTACT RESISTANCE: 30 MILL.OHM MAX
 - 3-4 OPERATION TEMPERATURE: -55°C TO +125°C
 - 3-5 DURABILITY: 3000 CYCLES, AFTER TEST. THE NORMAL FORCE ATTENUATION CANNOT EXCEED 15 %
 - 3-6 NORMAL FORCE: 90gf MIN AT THE WORKING POSITION, AFTER DURABILITY THE NORMAL FORCE 70g MIN.
- PART NO:**

PAN30-03123-XX00XX

BAT SERIES	FINISHED PRODUCT	TYPE	PITCH 3.0	PIN NO. 3PIN	PRODUCT ORDER	SF: 15u" MIN Au + 100 TIN	S1: 1u" MIN Au + 100 TIN	3: WITHOUT POST TYPE	HEIGHT
									12: H1.2

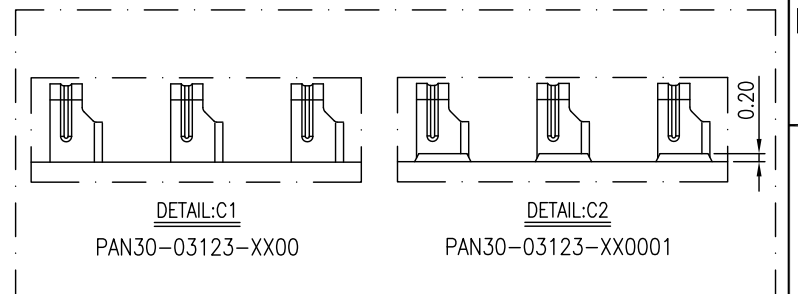


DIMENSION IN mm		TITLE: 3PIN 3.0 PITCH BATTERY CONN.			
TOLERANCE UNLESS OTHERWISE SPECIFIED		APR.	DWC NO. PAN30-03123-S100		
.X±0.35	X.*± 5'	CHK.	PROJ. CUSTOMER DRAWING		
.XX±0.25	.X.*± 3'	DRA. JunHuaTan	SIZE A4	SCALE 6:1	SHEET 1/3
.XXX±0.15	.XX.*± 1'	2012.12.20			REV. B




REV.	Q'TY	ECN. NO.	APR.	DATE
B		RD-EN-12-116		2012.12.20

※CAUTION

GUIDE LINE OF BATTERY PACK INSERTION

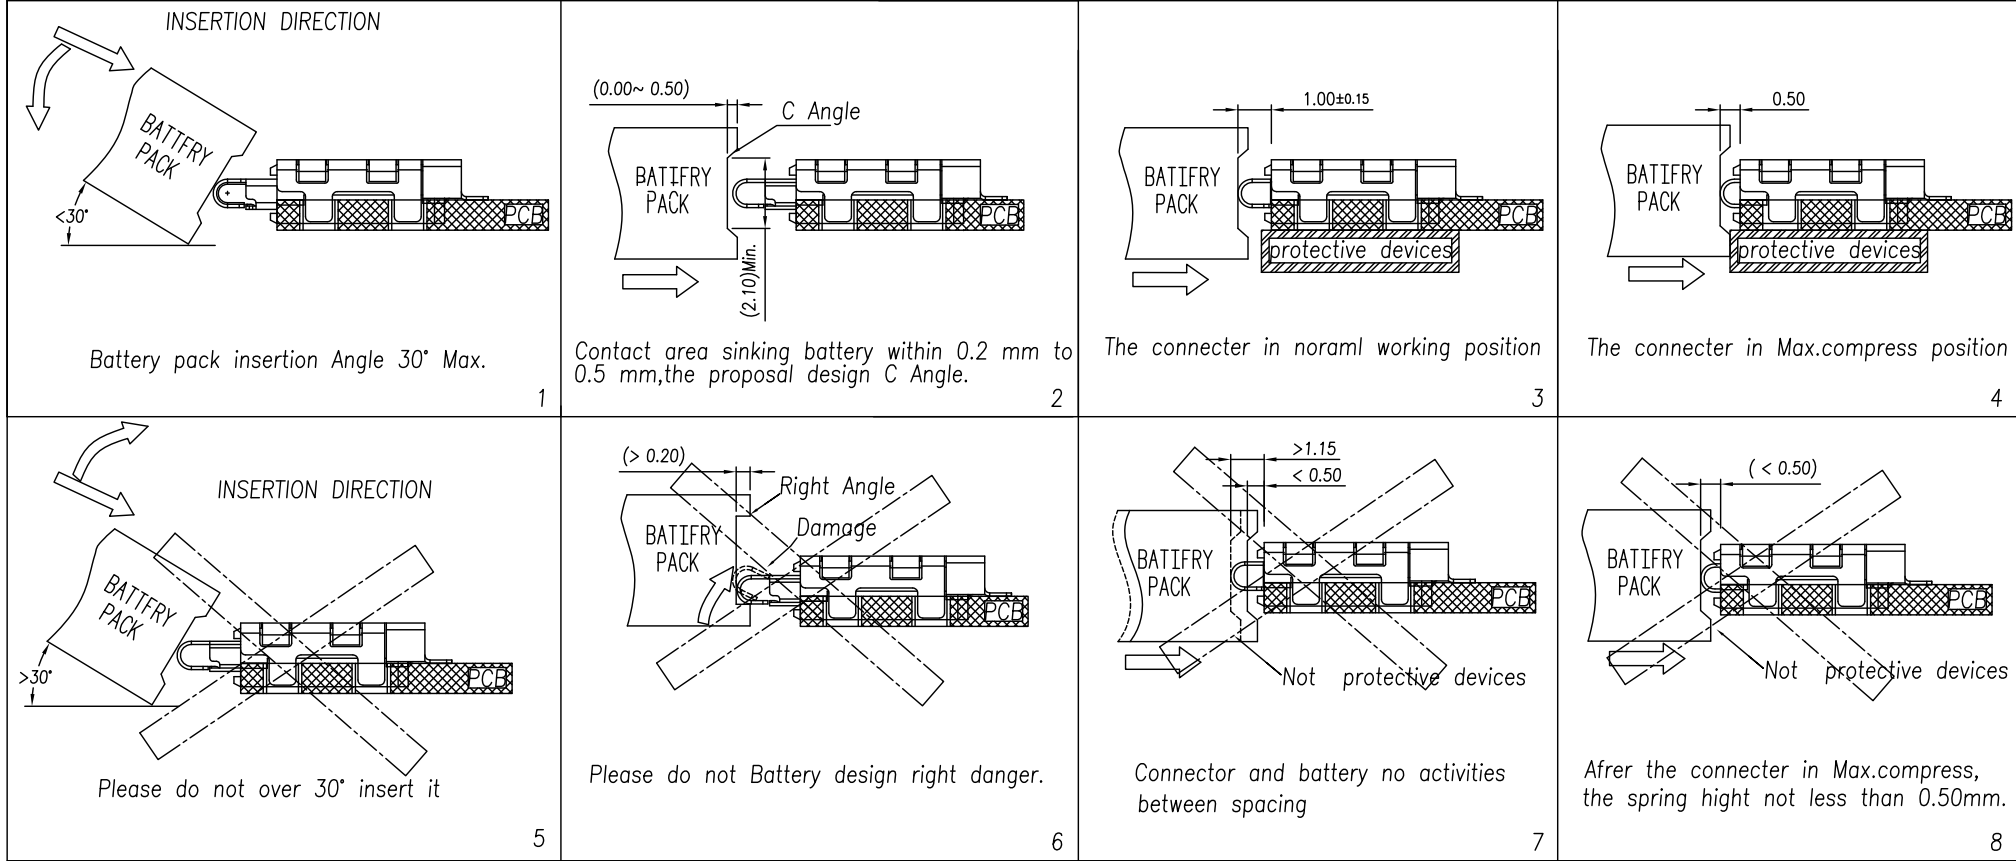

DIMENSION IN mm		LCN Shenzhen Linkconn Electronics Co.,Ltd.		
TOLERANCE UNLESS OTHERWISE SPECIFIED				
.X±0.35	X.*± 5'	APR.	TITLE: 3PIN 3.0 PITCH BATTERY CONN.	
.XX±0.25	.X.*± 3'	CHK.	DWG NO. PAN30-03123-S100	
.XXX±0.15	.XX.*± 1'	DRA. JunHuaTan 2012.12.20	PROJ.	CUSTOMER DRAWING
			SIZE A4	SCALE 6:1
			SHEET 2/3	REV. B

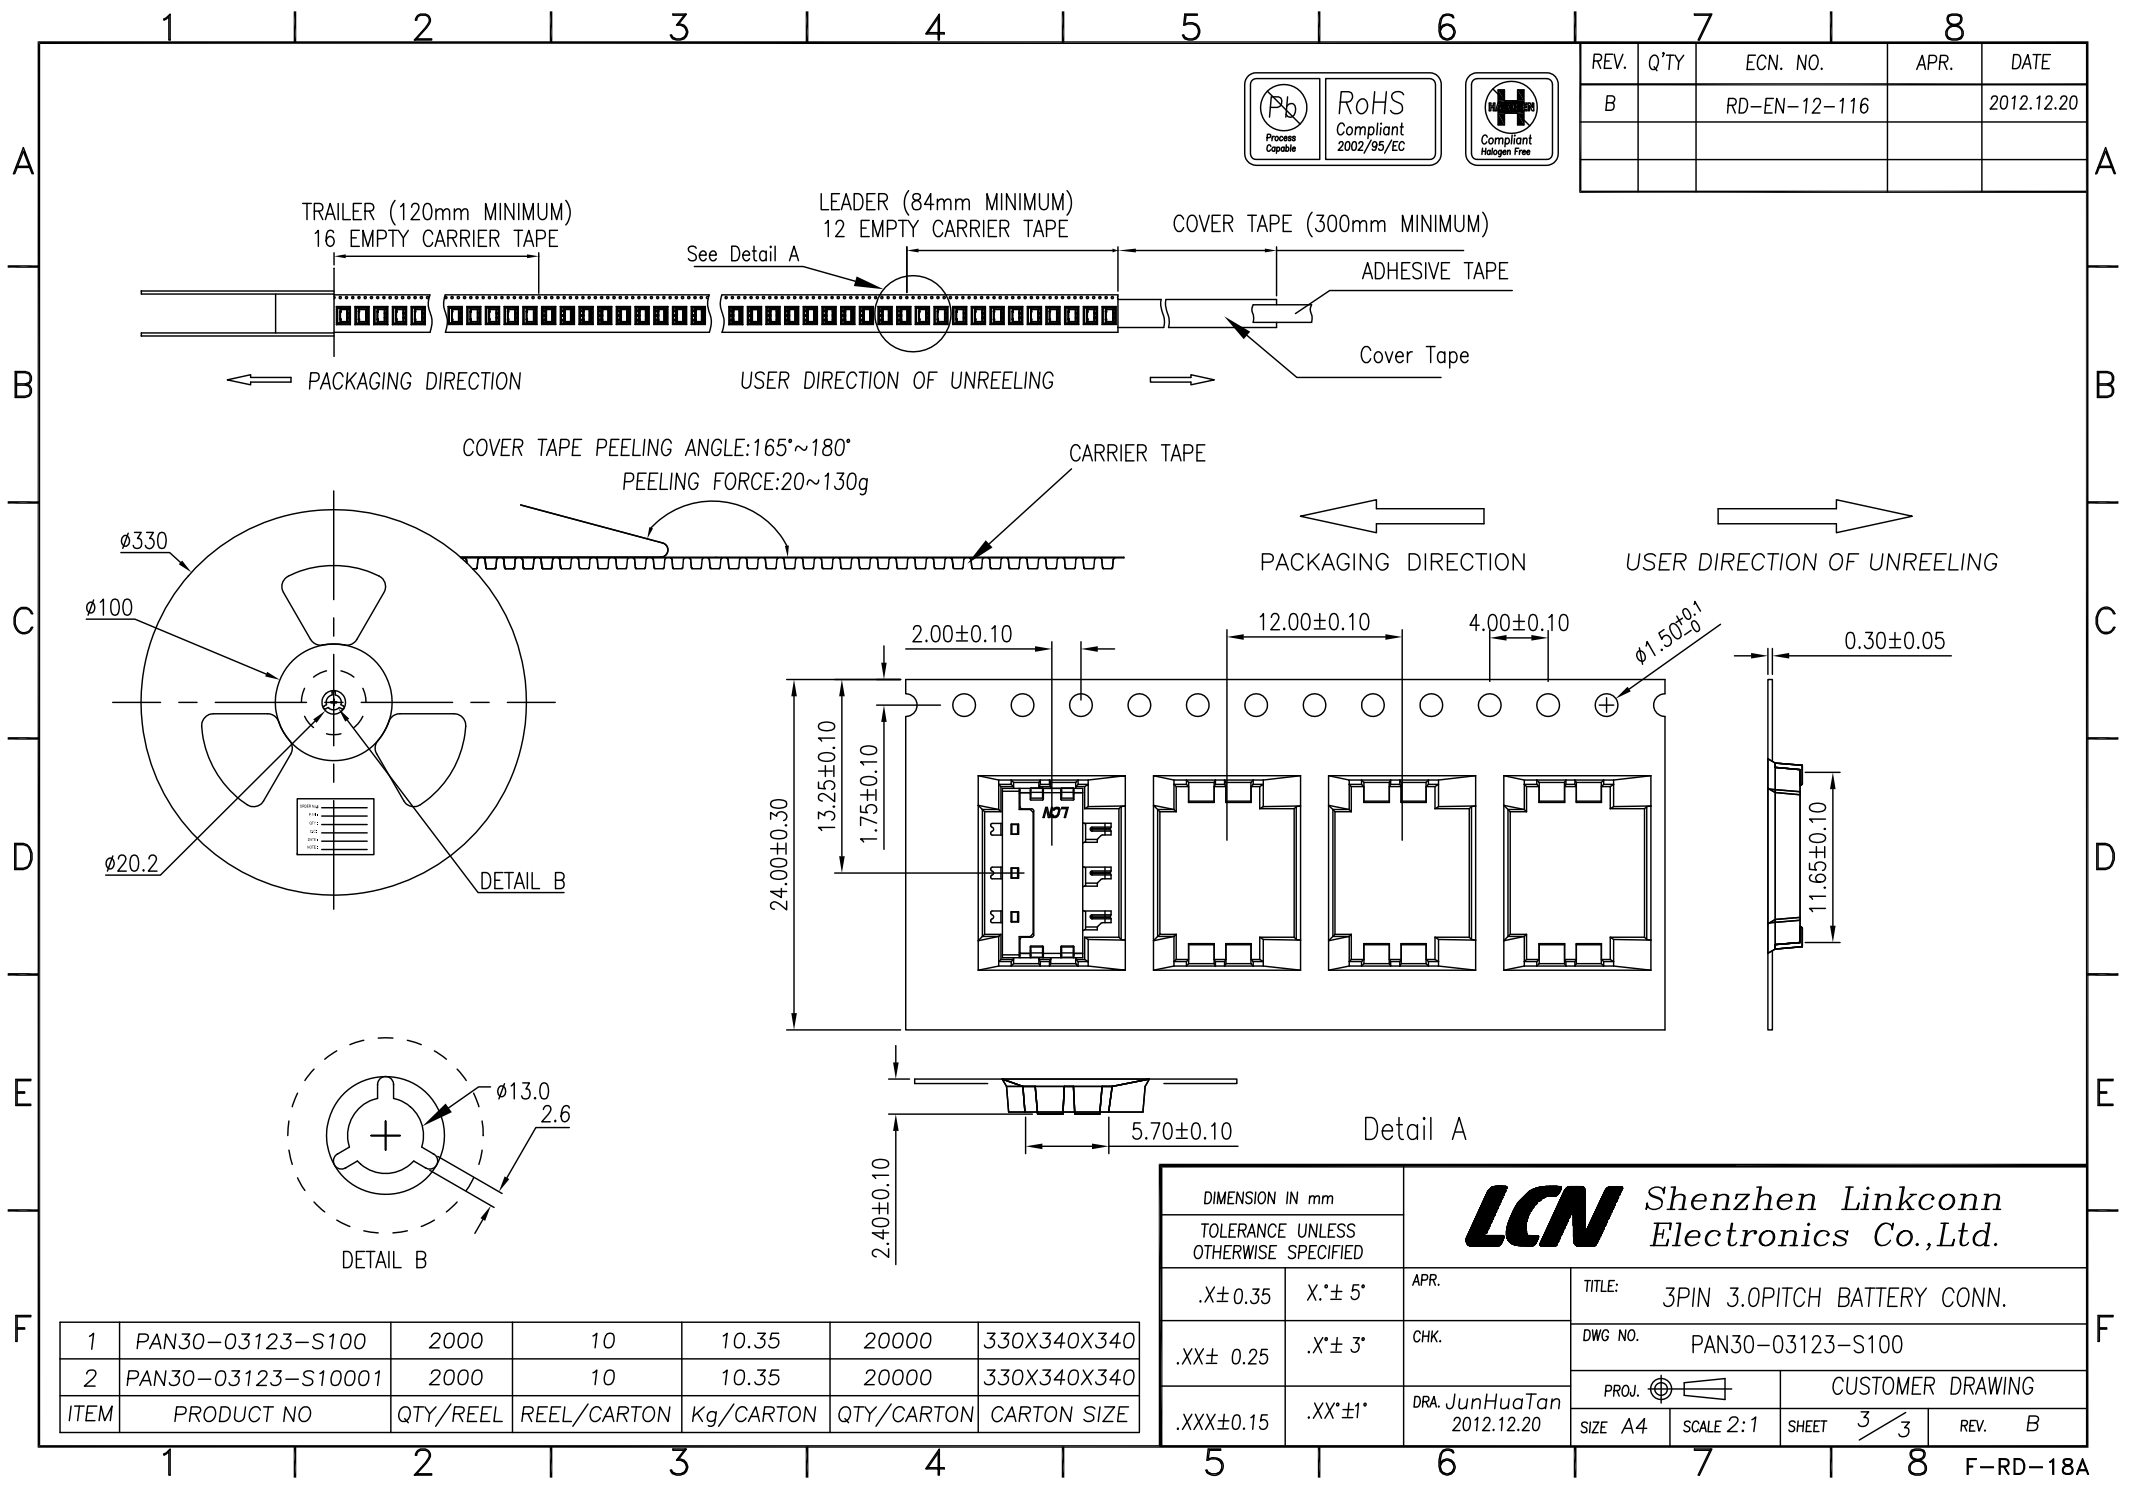

REV.	Q'TY	ECN. NO.	APR.	DATE
B		RD-EN-12-116		2012.12.20

1	PAN30-03123-S100	2000	10	10.35	20000	330X340X340
2	PAN30-03123-S10001	2000	10	10.35	20000	330X340X340
ITEM	PRODUCT NO	QTY/REEL	REEL/CARTON	Kg/CARTON	QTY/CARTON	CARTON SIZE

DIMENSION IN mm		Shenzhen Linkconn Electronics Co.,Ltd.	
TOLERANCE UNLESS OTHERWISE SPECIFIED			
.X±0.35	X.*± 5°	APR.	TITLE: 3PIN 3.0PITCH BATTERY CONN.
.XX± 0.25	.X*± 3°	CHK.	DWG NO. PAN30-03123-S100
.XXX±0.15	.XX*±1°	DRA. JunHuaTan 2012.12.20	PROJ. CUSTOMER DRAWING
		SIZE A4	SCALE 2:1 SHEET 3/3 REV. B